



Ideal for smooth and non-absorbent surfaces




VITEX THERM

Σύστημα Εξωτερικής Θερμομόνωσης
Thermal Insulation System



CEMENT

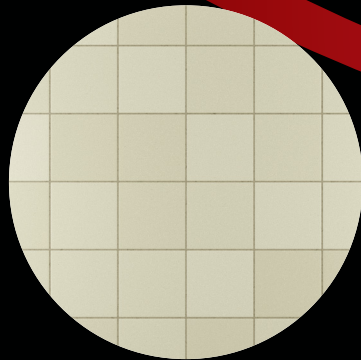

TILE



MARBLE

XBond
Quartz Sand Bonding Primer,
offers the ideal substrate preparation before applying the **Anti-Crack Protection System** or **External Thermal Insulation Composite System Vitextherm,** on both old and new buildings.

XBond
Primer



Multipurpose Strong Adhesion
Quartz Primer



vitex.gr/en

vitex.gr/en





Application



SURFACE PREPARATION

Surfaces should be smooth, clean and dry.



PRODUCT PREPARATION

Product should be stirred well before use to form a homogeneous mixture.



APPLICATION

Apply one coat by brush or roller in such a manner as to maintain its "embossed" texture.



TOP COAT

Apply the plaster or pressed cement screed after 8-10 hours.

Product features



PACKAGING

750mL, 3L, 10L



COVERAGE

8-12m²/L for one coat.
Ready to use



COLOURS

Light grey



STORAGE

Keep containers closed in a cool and dry area,
5 - 38°C

XBond Primer is a **quartz sand bonding primer** with high alkaline strength, suitable for indoor and outdoor use.

Ideal for smooth and non-porous surfaces.
Perfect adhesion to **concrete, tiles, marble, mosaic, metal surfaces, gypsum board and cement boards.**

It creates a rough surface and ideal adhesion conditions for the application of thermal insulation slabs, plaster for external insulation system.